

Таймеры

H3, H2Y/H3Y, H5B, TM, SY&H5T-4D, STP, TDV&TDF, MY, OFF DELAY, TMP, TW

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Россия +7(495)268-04-70

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Киргизия +996(312)-96-26-47

Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Казахстан +7(7172)727-132

Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93


H3 series ON DELAY TIMER/FLICKER/Y- Δ STARTER

Type	Multi-Range ON Delay Timer	Single-Range ON Delay Timer	Multi-Range Flicker	Y- Δ Starter
Model	H3-M□	H3-□□	H3-FK-M3	H3-TRD-30S
Figure				
Range	M1:1S/10S/1M/10M M3:3S/30S/3M/30M M6:6S/60S/6M/60M M1H:1M/10M/1H/10H M3H:3M/30M/3H/30H M6H:6M/60M/6H/60H	1S/3S/6S/10S 30S/60S/3M/6M 10M/30M/60M 3H/6H/10H/100H	3S/30S/3M/30M	30S Change Time:0.2S 0.1~0.5S is Available ON Demanded
Weight	155g	155g	140g	105g


Specification

Power Supply	12 or 24 VAC/DC or 110V or 230V or 380VAC 50/60Hz
Wattage Consump.	3VA max.
Control Output	Relay
Contact Rated	10A
Repetivity	0.2% of F.S max.
Setting Accuracy	5% of F.S max.
Reset Time	0.1S max.
Insulation Strength	100M Ω /500VDC
Dielectric Strength	2.5KV/1 min.
Circumstance	-20° ~ +60 °C , 35~85%RH
Life of Relay	20 X 10 ⁶ Times

Dimension

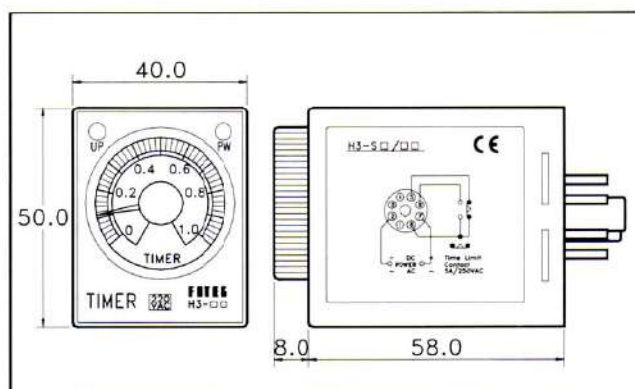

Connection & Timing Diagram

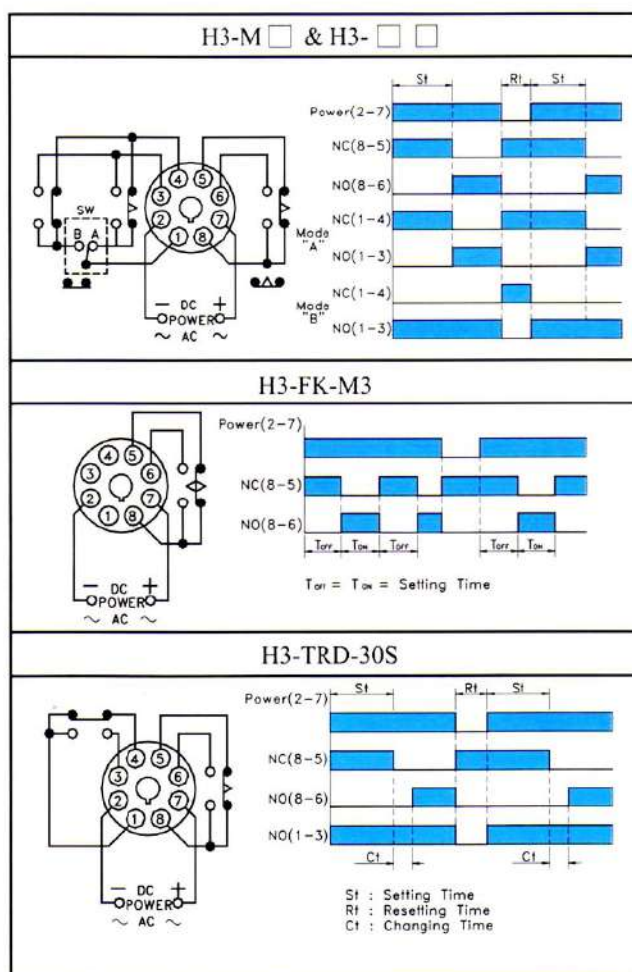

Panel Type POWER ON DELAY TIMER




H2Y/H3Y series

Outline	STPY	H3
Model	H2Y-□□	H3Y-□□
Figure		
Range	1S, 3S, 6S, 10S, 30S, 60S, 3M, 6M, 10M, 30M, 60M, 3H, 10H, 30H, 60H	
Wight	165g	160g


Specification

Power Supply	12 or 24 VAC/DC or 230V or 380 VAC 50/60Hz
Wattage Consump.	3VA max
Control Output	Relay
Contact Rated	10A
Repetivity	0.2% of F.S max.
Setting Accuracy	5% of F.S max.
Reset Time	0.1S max.
Insulation Strength	100M Ω /500VDC
Dielectric Strength	2.5KV/1 min.
Circumstance	-20 $^{\circ}$ ~+60 $^{\circ}$ C, 35~85%RH
Life of Relay	20 X 10 ⁶ Times

Connection & Timing Diagram

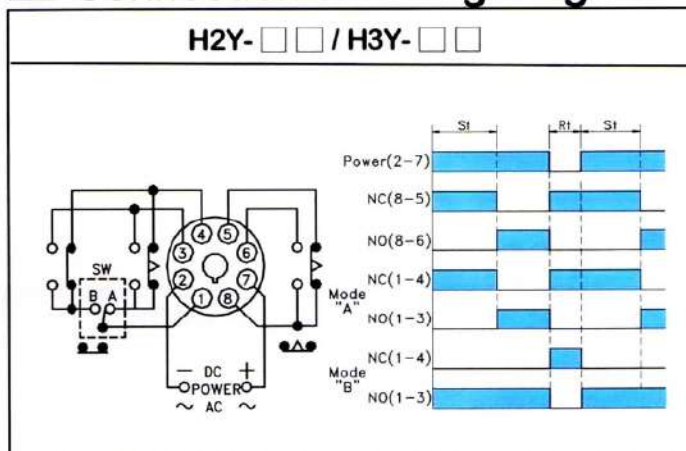

Dimension & Fixed Hole

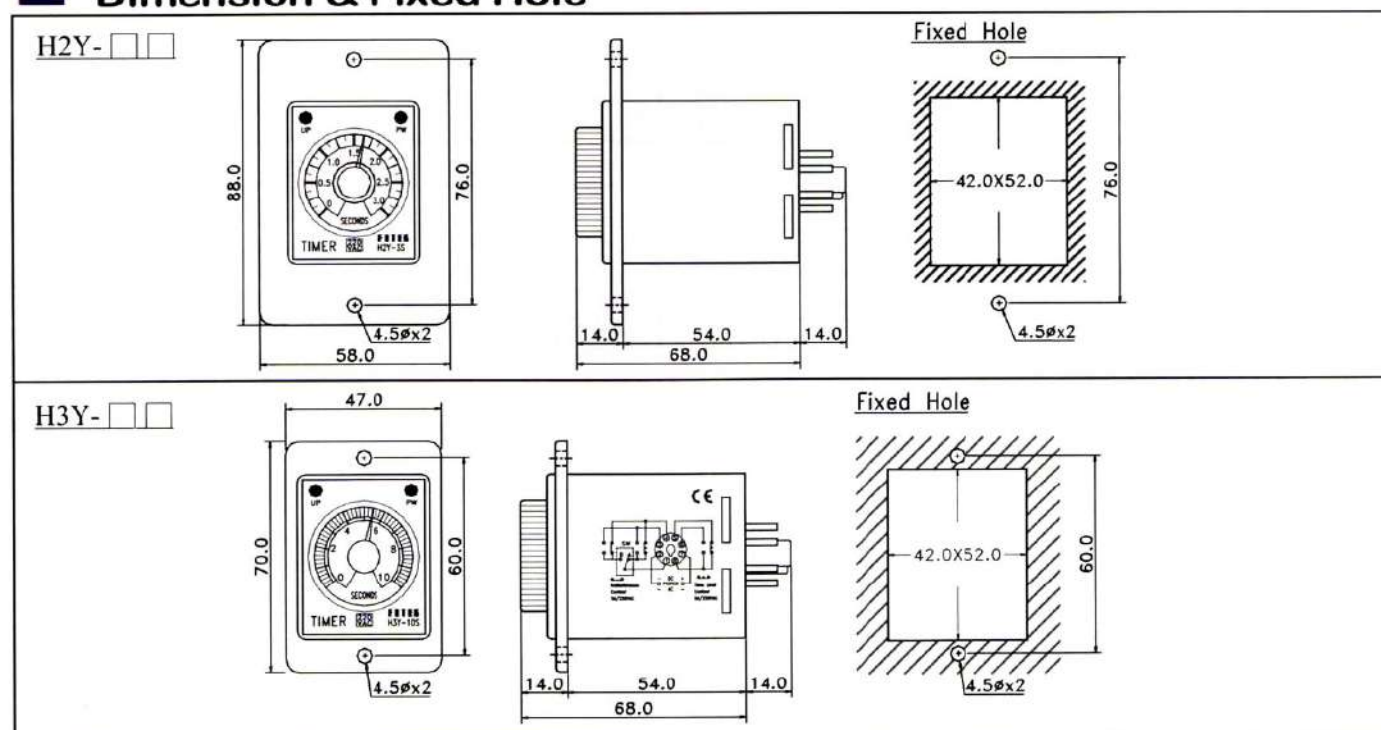


Type	Multi-Range ON Delay Timer	Multi-Range Flicker
Model	H5B-M ☐	H5B-FK-M3
Figure		
Range	M1 : 1S/10S/1M/10M M3 : 3S/30S/3M/30M M6 : 6S/60S/6M/60M M1H : 1M/10M/1H/10H M3H : 3M/30M/3H/30H M6H : 6M/60M/6H/60H	3S/30S/3M/30M
Weight	160g	150g


Specification

Power Supply	12 or 24 VAC/DC or 110V or 230V or 380VAC 50/60Hz
Wattage Consump.	3VA max.
Control Output	Relay
Contact Rated	10A
Repetivity	0.2% of F.S max.
Setting Accuracy	5% of F.S max.
Reset Time	0.1S max.
Insulation Strength	100M Ω /500VDC
Dielectric Strength	2.5KV/1 min.
Circumstance	-20° ~ +60 °C , 35~85%RH
Life of Relay	20X 10 ⁶ Times

Dimension

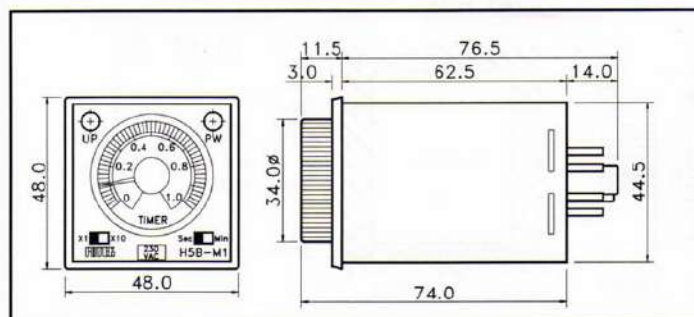

Connection & Timing Diagram

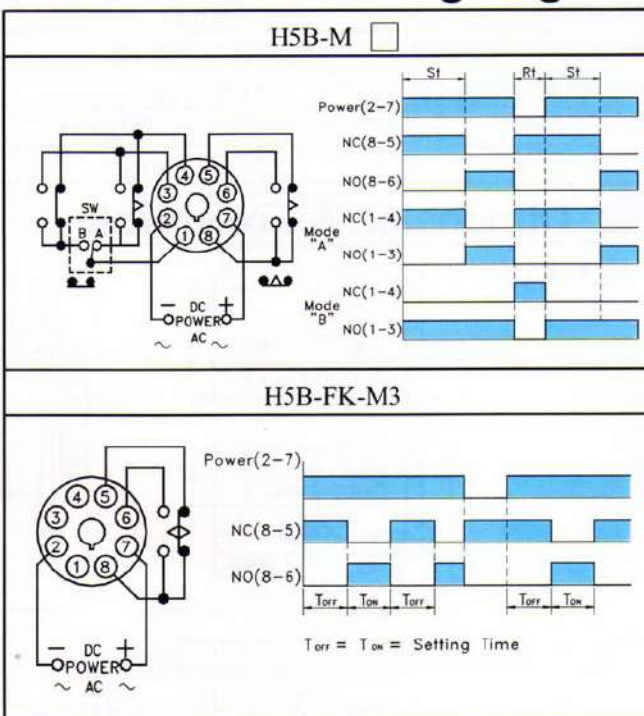

DIN 48X48 FREE POWER ON DELAY TIMER/FLICKER




**TM48
series**

Type	Multi-Range ON Delay Timer	Multi-Range Flicker
Model	TM48-M ☐	TM48-FK-M3
Figure		
Range	M1 : 1S/10S/1M/10M M3 : 3S/30S/3M/30M M6 : 6S/60S/6M/60M M1H : 1M/10M/1H/10H M3H : 3M/30M/3H/30H M6H : 6M/60M/6H/60H	3S/30S/3M/30M
Weight	145g	135g


Specification

Power Supply	24 ~ 250 VAC/DC 50/60Hz
Wattage Consump.	3VA max.
Control Output	Relay
Contact Rated	10A
Repetivity	0.2% of F.S max.
Setting Accuracy	5% of F.S max.
Reset Time	0.1S max.
Insulation Strength	100M Ω /500VDC
Dielectric Strength	2.5KV/1 min.
Circumstance	-20° ~ +60°C , 35~85%RH
Life of Relay	20 X 10 ⁶ Times

Dimension

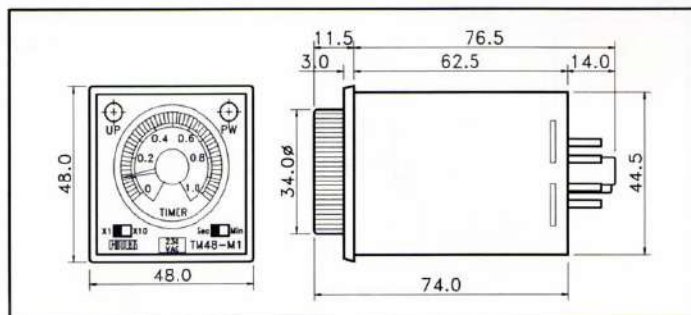

Connection & Timing Diagram

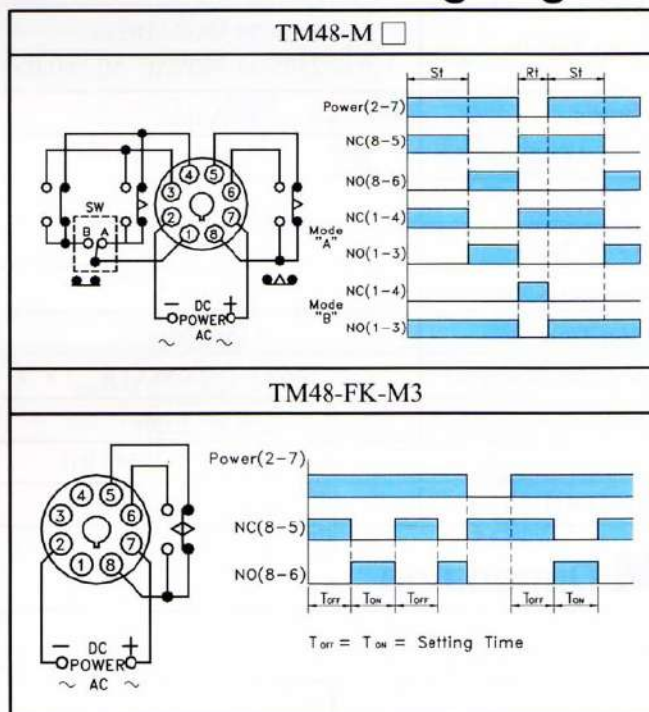

DIGITAL POWER ON DELAY TIMER


SY/H5T series

Outline	50 x 60			48 x 48
Model	SY-2D	SY-3D	SY-4D	H5T-4D
Figure				
Range	0~99	0~999	0~9999	0~9999
Display	0.56" Red LED	0.56" Red LED	0.4" Red LED	0.36" Red LED
Weight	145g	150g	155g	160g
Unit	S, 0.1S, 0.01S, M, 0.1M, H or 0.1H Selectable			

Specification

Power Supply	12V or 24VDC/AC or 90~250 VAC 50/60 Hz	
Wattage	5VA max.	
Control Output	A	Two Limit Contact
	B	Limit & Instantaneous
Output Method	Relay 10A	
Control Method	Power ON Delay	
Timing Method	UP or Down Selectable	
Repetivity	0.1% of F.S	
Setting Accuracy	0.05% of F.S	
Reset Time	0.1S max.	
Reset Method	Power OFF Reset	
Insulation Strength	100 M Ω / 500 VDC	
Dielectric Strength	2.5KV / 1 min	
Circumstance	-20° ~ +60°C, 35 ~ 85% RH	
Life of Relay	20 X 10 ⁶ Times	

Timing Chart

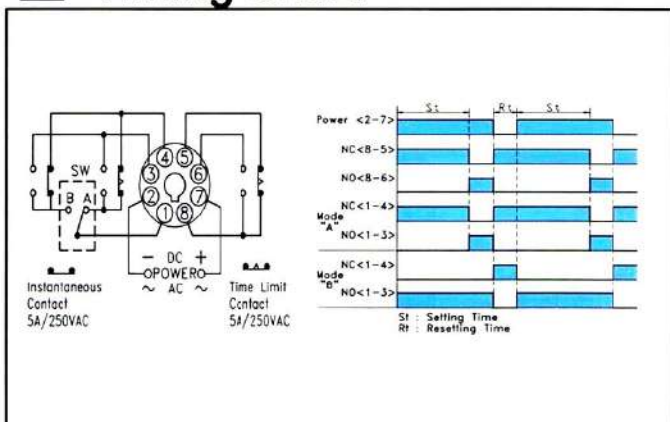

Illumination


Unit : S → 0.1S → 0.01S → M → 0.1M → H → 0.1H

< Push Key  To Select The Unit >

Slide Switch

LK : To Lock Unit Selecting N : Up Timer
UL : To Unlock Unit Selecting R : Down Timer
A : Time Limit Contact
B : Instantaneous Contact

Dimension Chart

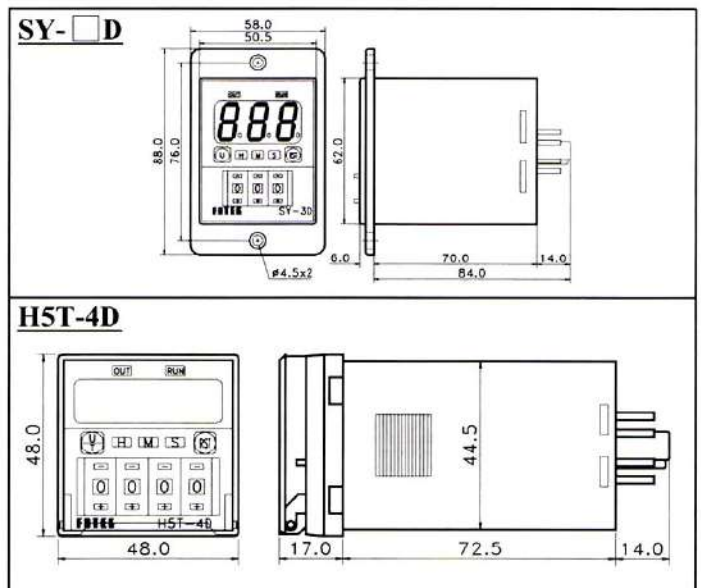

STP-□D/H5M series


MULTI-FUNCTION DIGITAL TIMER

Outline	50 x 60			48 x 48
Model	STP-2D	STP-3D	STP-4D	H5M-4D
Figure				
Range	0~99	0~999	0~9999	
Display	0.56" Red LED	0.56" Red LED	0.4" Red LED	0.36" Red LED
Weight	150g	155g	160g	155g
Unit	S→0.1S→0.01S→M→0.1M→H→0.1H			Selectable

Specification

Power Supply	90~250 VAC 50/60 Hz
Wattage	5VA max.
Memory Method	EEPROM.
Timing Method	UP or Down Selecting
Time Input	Hi > 6V, Lo < 2V
Reset Input	Hi > 6V, Lo < 2V
Output Method	Relay, 10A
Output Control	N / R Selectable
Control Method	10 mode
DC Output	60 mA / 12 VDC
Delay Timer<t>	0.1~9.9 S
Insulation Strength	100 MΩ / 500 VDC
Dielectric Strength	2.5KV / 1 min.
Circumstance	-20° ~ +60°C, 35 ~ 85% RH
Life	20 X 10 ⁶ Timer

Connection Diagram

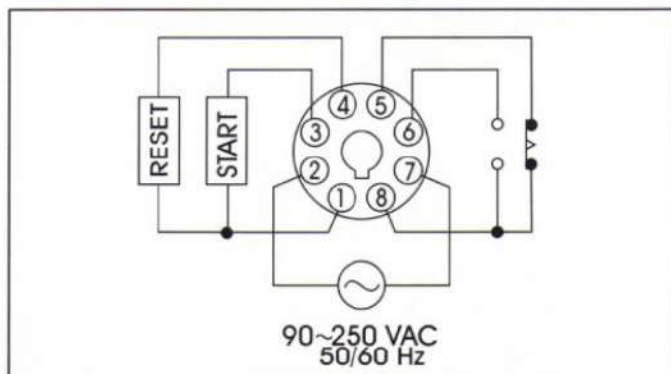

Illumination

Unit : S→0.1S→0.01S→M→0.1M→H→0.1H

< Push (RST) & (RST) Key To Select The Unit >

Slide Switch

"N" : UP Timing

"R" : Down Timing

"LK" : To Lock Unit Selection

"UL" : To Unlock Unit Selection

Inside DIP Switch


No.1 : ON=Auto Reset

: OFF= Manual Reset


No.2 : ON=Memory

: OFF=Non-Memory

Dimension

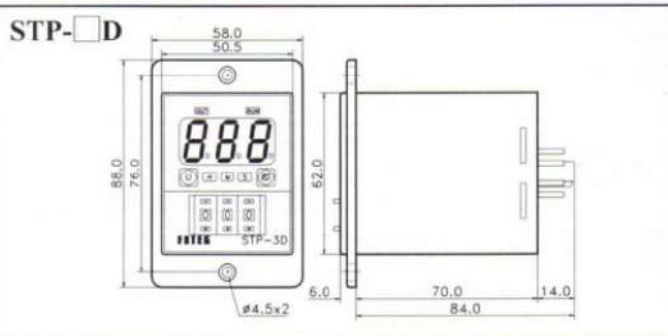

H5M-4D

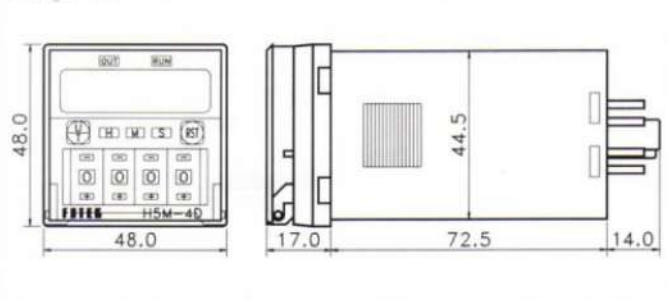


RS-0	Integrated Timer	RS-9	Flicker < B >
RS-1	Instant Input One Shot < A >	RS-2	Instant Input One Shot < B >
RS-3	Instant Input ON Delay < A >	RS-4	Instant Input ON Delay < B >
RS-5	Keep Input One Shot	RS-6	Keep Input ON Delay
RS-7	Input OFF Delay	RS-8	Flicker < A >

Type	Multi-Range ON Delay Timer		Multi-Range Flicker	
Model	STPN-M ☐	STPY-M ☐	STPN-FK-M3	STPY-FK-M3
Figure				
Range	M1 : 1S / 10S / 1M / 10M M3 : 3S / 30S / 3M / 30M M6 : 6S / 60S / 6M / 60M M1H : 1M / 10M / 1H / 10H M3H : 3M / 30M / 3H / 30H M6H : 6M / 60M / 6H / 60H		3S/30S/3M/30M	
Weight	190g	195g	185g	190g


Specification

Power Supply	12 or 24 VAC / DC or 110 or 230V or 380VAC 50 / 60 Hz
Wattage	3 VA max.
Control Output	Relay
Contact Rated	10A
Repetivity	0.5% of F.S
Setting Accuracy	5% of F.S
Reset Time	0.1Sec Max.
Insulation Strength	100 M Ω / 500 VDC
Dielectric Strength	2.5KV / 1 min
Circumstance	-20° ~ +60°C, 35 ~ 85% RH
Life of Relay	20 X 10 ⁶ Times

Dimension

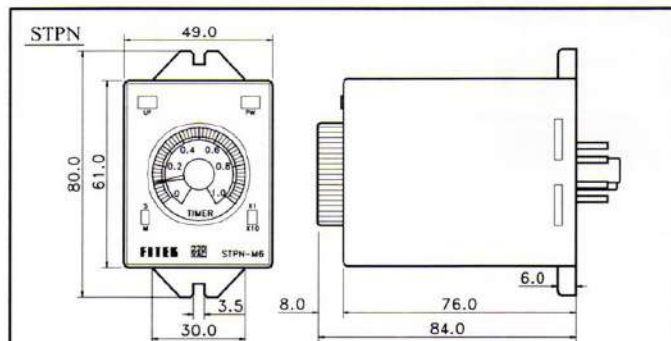

Timing Chart

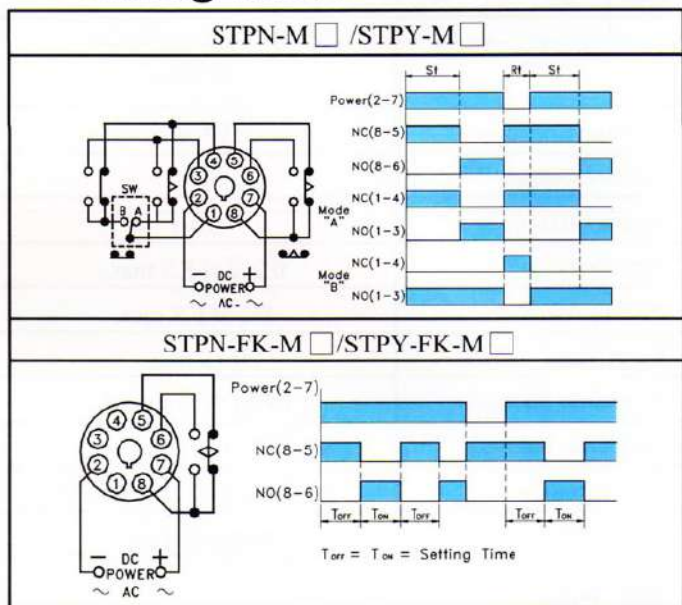

CE TWIN TIMER & DEFROSTING TIMER


TDV & TDF series

Type	Multi-Range Twin Timer		Multi-Range Defrosting Timer	
Model	TDVN-M ☐	TDVY-M ☐	TDFN-12H	TDFY-12H
Figure				
Range	M3 = 3S/30S/3M/30M M6 = 6S/60S/6M/60M M3H = 3M/30M/3H/30H M6H = 6M/60M/6H/60H		Cooling : 12H Defrosting : 30M	
Weight	190g	195g	190g	195g

Specification


Power Supply	12 or 24 VAC/DC 110V or 230V or 380VAC 50/60Hz
Wattage	3VA max.
Control Output	Relay
Contact Rated	10A
Repetivity	0.5% of F.S
Setting Accuracy	5% of F.S
Reset Time	0.1 Sec Max.
Insulation Strength	100M Ω /500VDC
Dielectric Strength	2.5KV/1 min.
Circumstance	-20° ~+60 °C , 35~85%RH
Life of Relay	20 X 10 ⁶ Times

Timing Chart

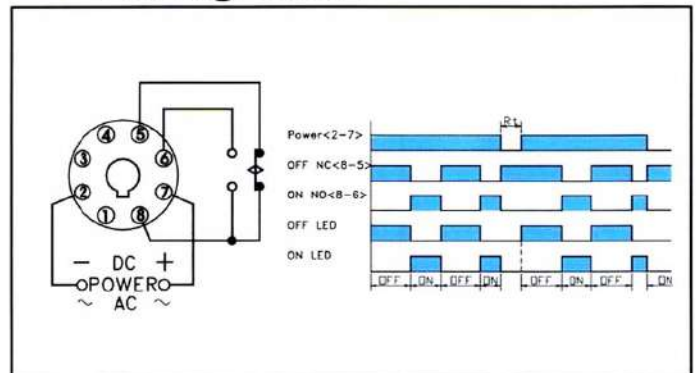


Dimension

N Type

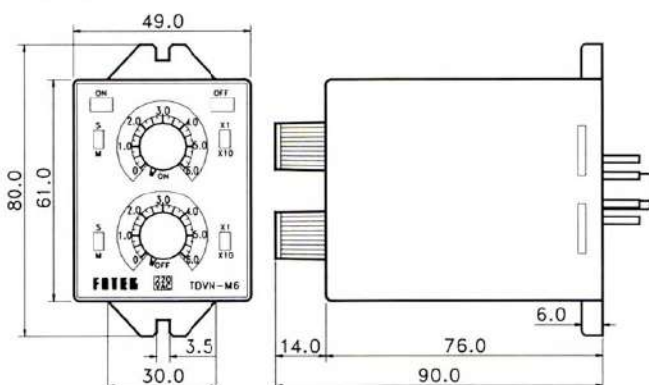

Y Type

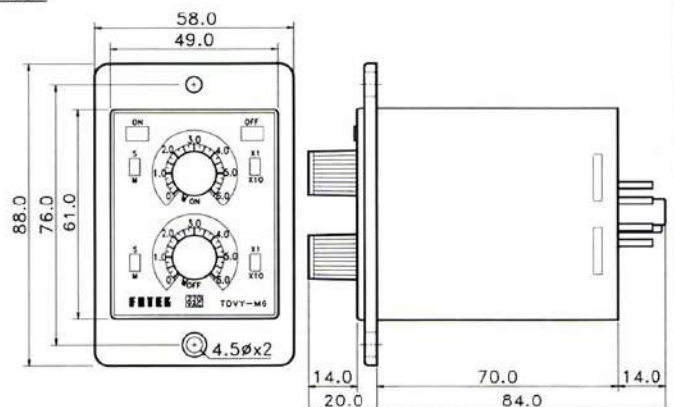

- ☆High Repetivity : 0.2% of F.S. Max.
- ☆Reset Time : 0.1S Max.
- ☆Setting Accuracy : 5 % of F.S. Max.
- ☆CE Approved : EMC , ESD & LVD
- ☆Guiding of Model :

MY - 10S - 2P - 220V

①

②

③

④

① : Series

② : Range

③ : Contact Poles


④ : Operating Voltage





Specification

MODEL	MY- □□ - □ P- □□□ V
Range	1S/3S/6S/10S/30S 60S/3M/6M/10M/30M 60M/3H/6H/10H/30H
Power Supply	12 or 24 VDC 10V α 20VAC 50/60Hz
Wattage Consump.	3VA max.
Control Output	Relay
Contact Rated	7A/250VAC
Repetivity	0.2% of F.S max.
Setting Accuracy	5% of F.S max.
Reset Time	0.1S max.
Insulation Strength	100M Ω /500VDC
Dielectric Strength	2.5KV/1 min.
Circumstance	-20 $^{\circ}$ ~ +60 $^{\circ}$ C , 35~85%RH
Life of Relay	20 X 10 ⁶ Times

Timing Chart Connection & Tim

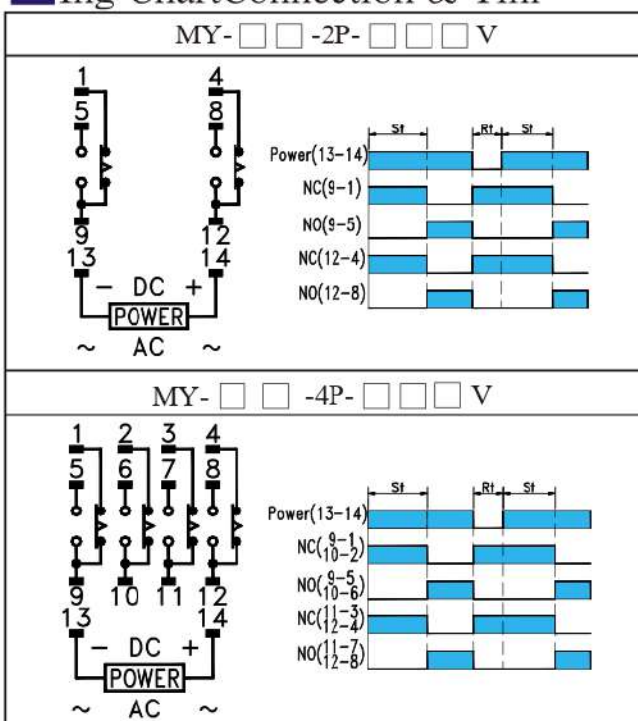

Dimension

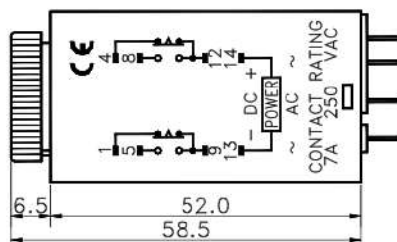

OFF DELAY TIMER




TF
series

Outline	50x60	40x50	48x48
Model	TFN - □□	H3-TF - □□	H5B-TF - □□
Figure			
Range	3S, 6S, 10S, 30S, 60S, 3M		
Contact Rated	5A/250VAC	1A/250VAC	5A/250VAC
Weight			





Specification

Item	Data
Power Supply	12V or 24 VAC/DC or 110V or 230V or 380VAC 50/60Hz
Wattage	3VA max.
Control Output	Relay < 1C >
Repetitive	0.5% of F.S.
Setting Accuracy	5.0% of F.S.
Reset Time	0.1sec Max.
Insulation Strength	100M Ω / 500 VDC
Dielectric Strength	2.5 KV / 1 Min.
Life of Relay	20 X 10 ⁵ Times
Circumstance	-20°C~+60°C, 35~85%RH

Connecting Diagram/Timing Chart

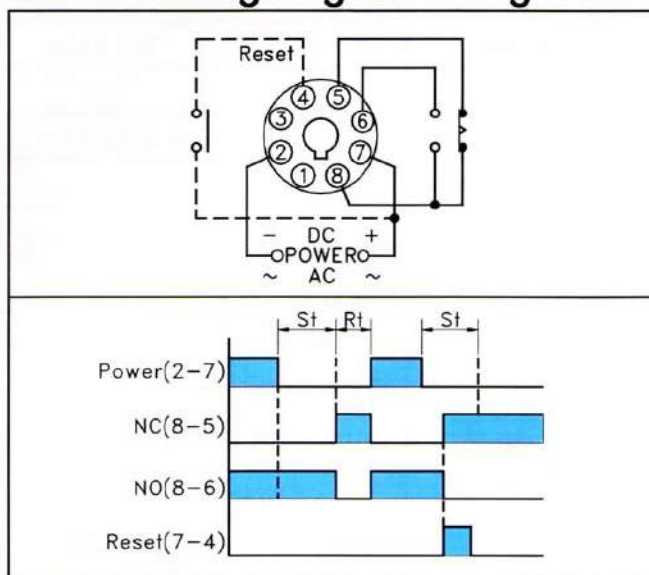

Dimension

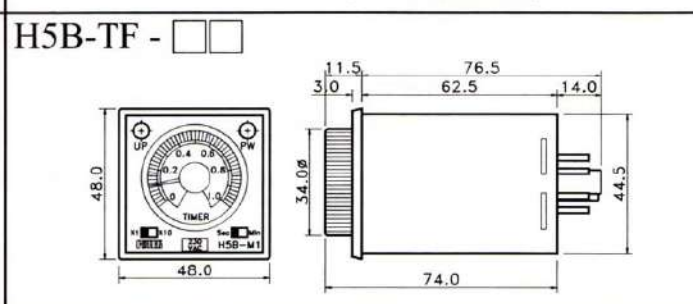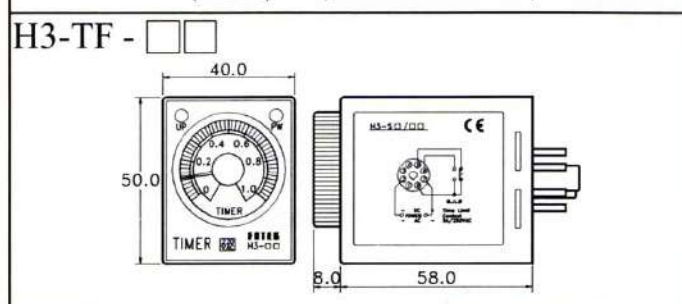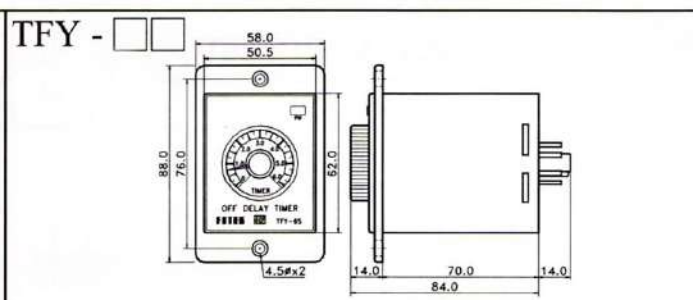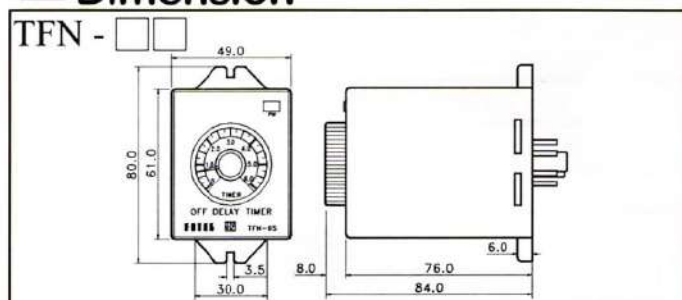

Power ON delay Digital timer



TM
series

※Multi-timing range

多種計時單位

※Timing method selectable

計時模式可選擇

※Output status changeable

輸出狀態可選擇

※Control output changeable


輸出控制模式可選擇




■ General data / 共同規格

Item	項目	Specification 規格
Power supply	工作電壓	24VDC/AC or 90 ~ 265VAC 50/60Hz
Current consumption	耗電流	5VA max.
Control output	控制輸出	Two time limit or time limit & instantaneous contact selectable
Output method	輸出方式	Two relay 5A/250VAC
Control method	控制方式	Power on delay
Output status	輸出狀態	Timing NO or NC selectable
Timing method	計時方式	Increasing or decreasing timing selectable
Repetivity	重複性	0.1% of F.S.
Setting accuracy	設定精度	0.05% of F.S.
Reset time	復歸時間	0.1sec max.
Reset method	復歸方式	Power off reset
Insulation strength	絕緣強度	100M Ω / 500VDC
Dielectric strength	耐壓強度	2.5kV / 1min.
Circumstance	工作環境	- 20°C ~ +60°C , 35 ~ 85%RH
Life of relay	繼電器壽命	20x10 ⁶ times

■ Connection diagram & Timing chart 接線圖及時序圖

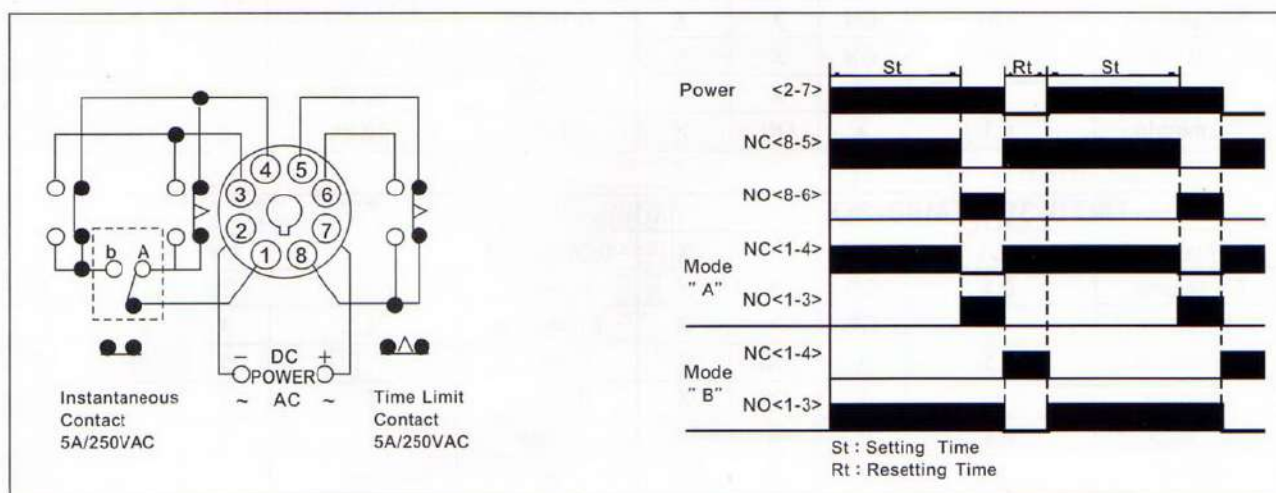

Function selecting / 功能選擇

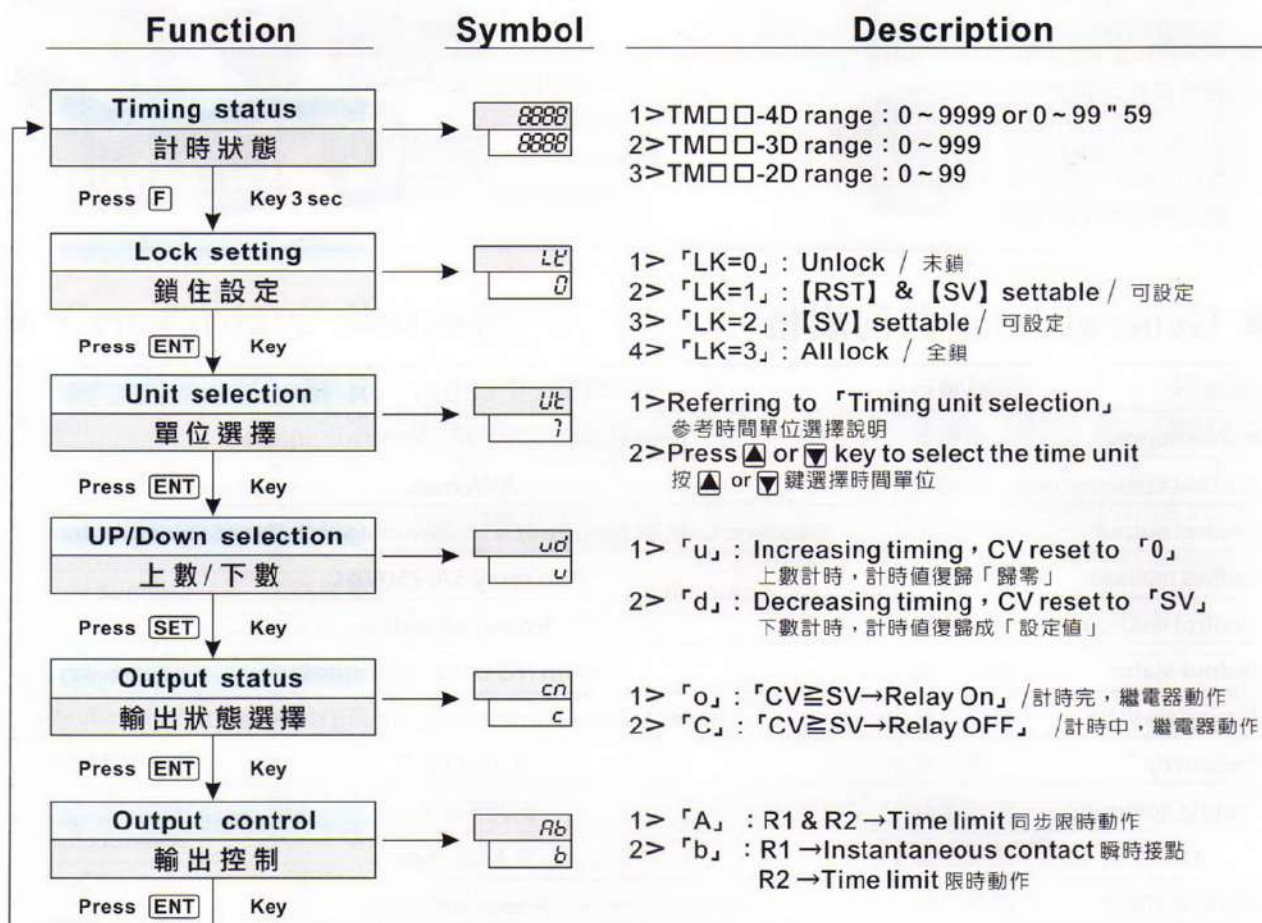

Timing unit selecting / 時間單位選擇

TM48-4D / TM50-4D / TM60-4D									
Time unit	SV Display	LED ON or OFF			Time unit	SV Display	LED ON or OFF		
		Sec	Min	Hr			Sec	Min	Hr
0.001second	0.001	ON	X	X	1 minute	1	X	ON	X
0.01second	0.01	ON	X	X	0.1 hour	0.1	X	X	ON
0.1second	0.1	ON	X	X	1 hour	1	X	X	ON
1 second	1	ON	X	X	99m59s	00.01	ON	ON	X
0.1 minute	0.1	X	ON	X	99h59m	00.01	X	ON	ON

TM50-3D / TM60-3D					TM50-2D				
0.01second	0.01	ON	X	X	0.01 second	0.1	ON	X	X
0.1 second	0.1	ON	X	X	1 second	1	ON	X	X
1 second	1	ON	X	X	0.1 minute	0.1	X	ON	X
0.1 minute	0.1	X	ON	X	1 minute	1	X	ON	X
1 minute	1	X	ON	X	0.1 hour	0.1	X	X	ON
0.1 hour	0.1	X	X	ON	1 hour	1	X	X	ON
1 hour	1	X	X	ON	---	---	---	---	---

動作延遲型 數字式計時器



TM
series

Outline 外形	50x60		
Model 型號	TM50-2D	TM50-3D	TM50-4D
Figure 外觀			
Range 範圍	0 ~ 99	0 ~ 999	0 ~ 9999
Unit 單位	0.1s/1s/0.1m/1m 0.1h/1h selectable	0.01s/0.1s/1s 0.1m/1m/0.1h/1h selectable	0.001s/0.01s/0.1s 1s/0.1m/1m/0.1h/1h 99m59s/99h59m selectable

Outline 外形	Din 48x48	60x50	
Model 型號	TM48-4D	TM60-3D	TM60-4D
Figure 外觀			
Range 範圍	0 ~ 9999	0 ~ 999	0 ~ 9999
Unit 單位	0.001s/0.01s/0.1s 1s/0.1m/1m/0.1h/1h 99m59s/99h59m Selectable	0.01s/0.1s/1s 0.1m/1m/0.1h/1h selectable	0.001s/0.01s/0.1s 1s/0.1m/1m/0.1h/1h 99m59s/99h59m selectable

Outline dimension

TM48-4D	TM50-□D	TM60-□D
----------------	----------------	----------------

- ※ **Multifunction** / 多功能、多範圍
- ※ **Multi-timing range** / 多種計時模式
- ※ **Timing method selectable** / 多種計時模式
- ※ **Output status changeable** / 輸出狀態可選擇
- ※ **Control output changeable** / 多種輸出控制模式
- ※ **Memory function settable** / 記憶功能可選擇



■ General data 共同規格

Outline	外形	50x60			60x50		48x48
Model	型號	TMP50-2D	TMP50-3D	TMP50-4D	TMP60-3D	TMP60-4D	TMP48-4D
Display digits	顯示位數	2	3	4	3	4	4
Time unit	時間單位	0.1s/s/0.1m/m 0.1h/h	0.01s/0.1s/s 0.1m/m/0.1h/h	0.001s/0.01s/0.1s s/0.1m/m/0.1h/h 99m59s/99h59m	0.01s/0.1s/s 0.1m/m/0.1h/h	0.001s/0.01s/0.1s s/0.1m/m/0.1h/h 99m59s/99h59m	0.001s/0.01s/0.1s s/0.1m/m/0.1h/h 99m59s/99h59m
Power supply	工作電壓	24VDC/AC or 90 ~ 265VAC 50/60Hz					
Current consumption	耗電流	5VA max.					
DC power output	直流輸出	60mA / 12VDC max.					
Output method	輸出方式	Relay 1a : 3A/250VAC					
Output control	輸出控制	N / R / C selectable					
Output status	輸出狀態	Timing ON or OFF selectable					
Timing method	計時方式	Increasing or decreasing timing selectable					
Repetitiveness	重複性	0.1% of F.S.					
Setting accuracy	設定精度	0.05% of F.S.					
Insulation strength	絕緣強度	100M Ω / 500VDC					
Dielectric strength	耐壓強度	2.5kV / 1min.					
Circumstance	工作環境	- 20°C ~ +60°C , 35 ~ 85%RH					
Life of relay	繼電器壽命	20x10 ⁶ times					

■ Outline dimension

TMP48-4D 	TMP50-□□ 	TMP60-□□
---------------------	---------------------	---------------------

■ Function selecting / 功能選擇


Function	Symbol	Description
Timing status 計時狀態 Press Key	 	1> □□-4D range : 0 ~ 9999 or 0 ~ 99 59 2> □□-3D range : 0 ~ 999 3> □□-2D range : 0 ~ 99
Lock setting 鎖住設定 Press Key	 	1> 「LK=0」: Unlock / 未鎖定 2> 「LK=1」: [RST] & [SV] settable 3> 「LK=2」: [SV] settable 4> 「LK=3」: All lock
Mode selection 模式選擇 Press Key	 	1> 「nd=0」: Input kept ON timing 有輸入信號才計時 2> 「nd=1」: One shot input timing 脈衝信號自動計時 3> 「nd=2」: Input OFF timing reset 無輸入信號自動復歸
Unit selection 單位選擇 Press Key	 	1> Referring to 「Timing unit selection」 參考時間單位選擇說明 2> Press or key to select the time unit 按 or 鍵選擇時間單位
Up/Own setting 正倒數計時設定 Press Key	 	1> 「ud=u」: Increasing timing, CV reset to 「0」 正數計時，計時值復歸是「歸零」 2> 「ud=d」: Decreasing timing, CV reset to 「SV」 倒數計時，計時值復歸是「設定值」
Output status 輸出狀態選擇 Press Key	 	1> 「cn=0」: 「CV≥SV→Relay On」 計時完成，繼電器動作 2> 「cn=c」: 「CV≥SV→Relay OFF」 計時中，繼電器動作
Memory setting 記憶設定 Press Key	 	1> 「nE=E」: Time with memory / 附停電記憶 2> 「nE=n」: Time without memory / 無停電記憶

■ Timing unit selecting / 時間單位選擇


TMP48-4D / TMP50-4D / TMP60-4D									
Time unit	SV Display	LED ON or OFF			Time unit	SV Display	LED ON or OFF		
		Sec	Min	Hr			Sec	Min	Hr
0.001 second	0.001	ON	X	X	1 minute	1	X	ON	X
0.01 second	0.01	ON	X	X	0.1 hour	0.1	X	X	ON
0.1 second	0.1	ON	X	X	1 hour	1	X	X	ON
1 second	1	ON	X	X	99m59s	00.01	ON	ON	X
0.1 minute	0.1	X	ON	X	99h59m	00.01	X	ON	ON

TMP50-3D / TMP60-3D					TMP50-2D				
0.01 second	0.01	ON	X	X	0.1 second	0.1	ON	X	X
0.1 second	0.1	ON	X	X	1 second	1	ON	X	X
1 second	1	ON	X	X	0.1 minute	0.1	X	ON	X
0.1 minute	0.1	X	ON	X	1 minute	1	X	ON	X
1 minute	1	X	ON	X	0.1 hour	0.1	X	X	ON
0.1 hour	0.1	X	X	ON	1 hour	1	X	X	ON
1 hour	1	X	X	ON	---	---	---	---	---


■ Timing & output control / 輸出控制時序圖

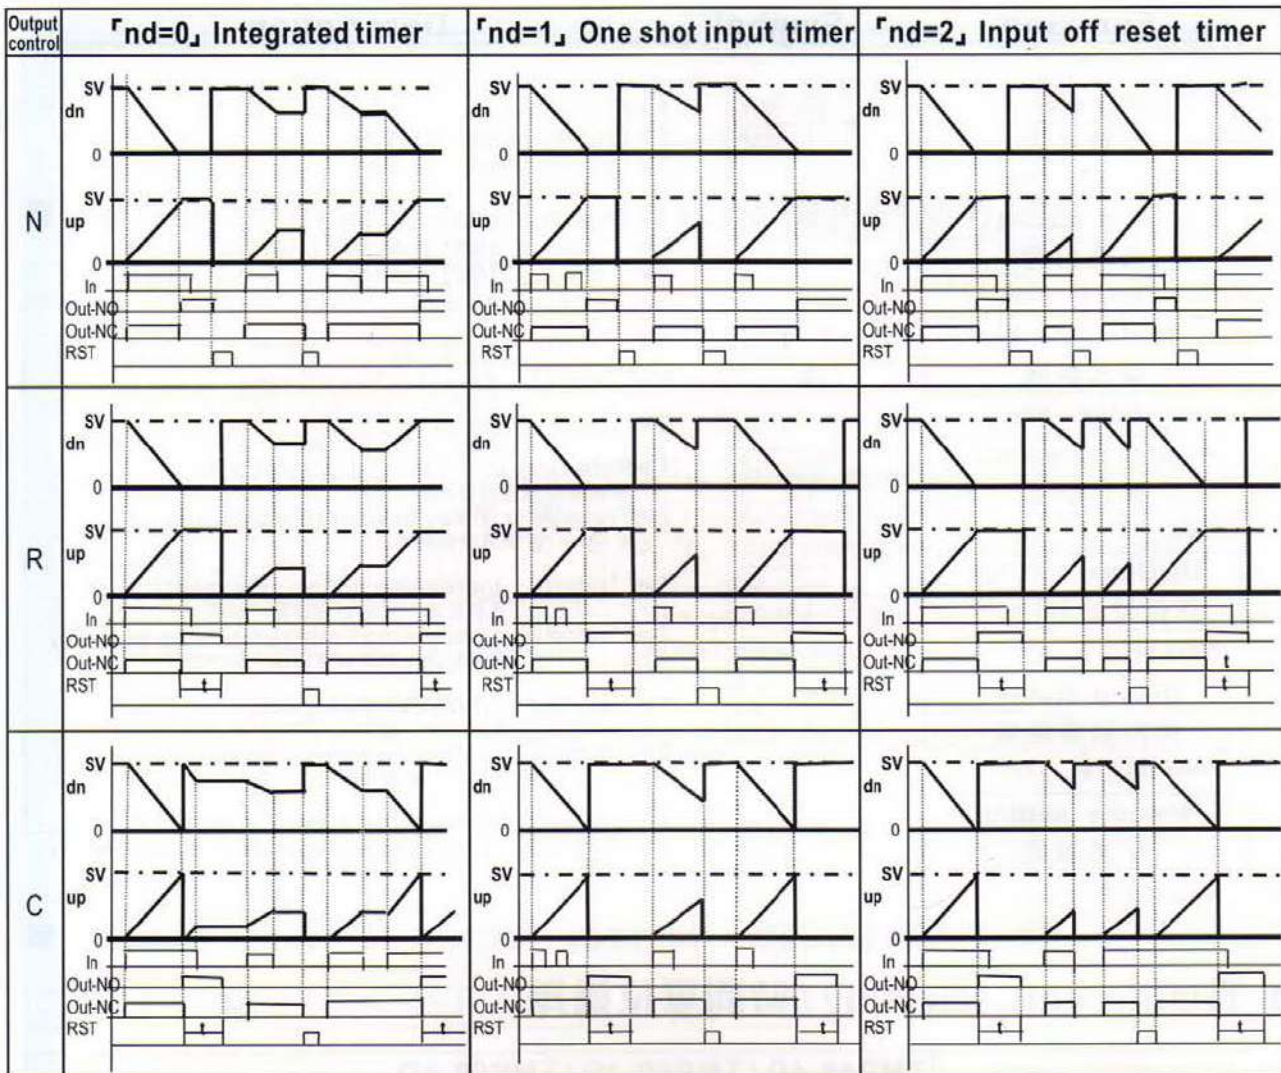


■ Setting of Output control / 輸出控制方式設定

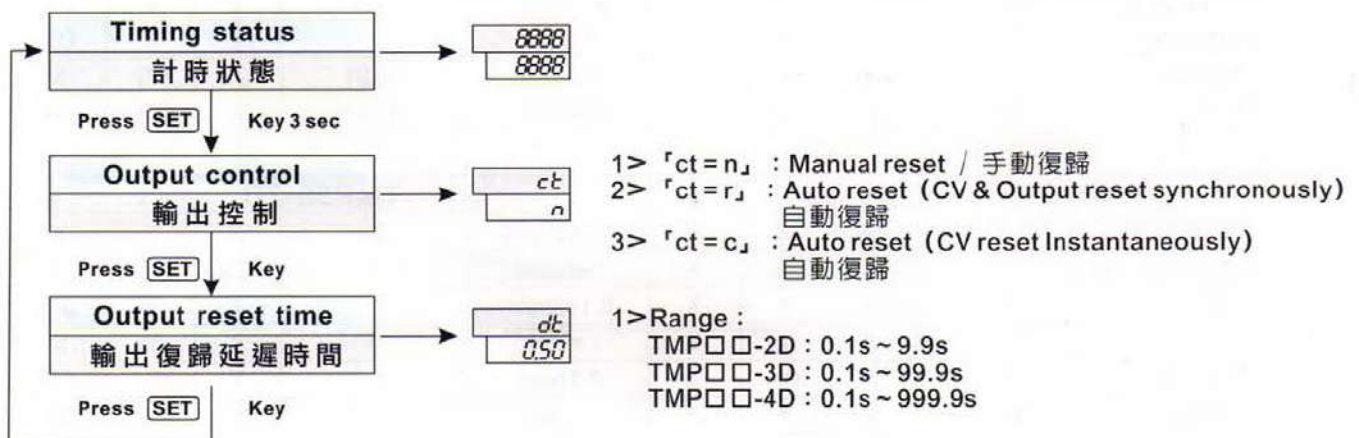

■ Timing & output control / 輸出控制時序圖

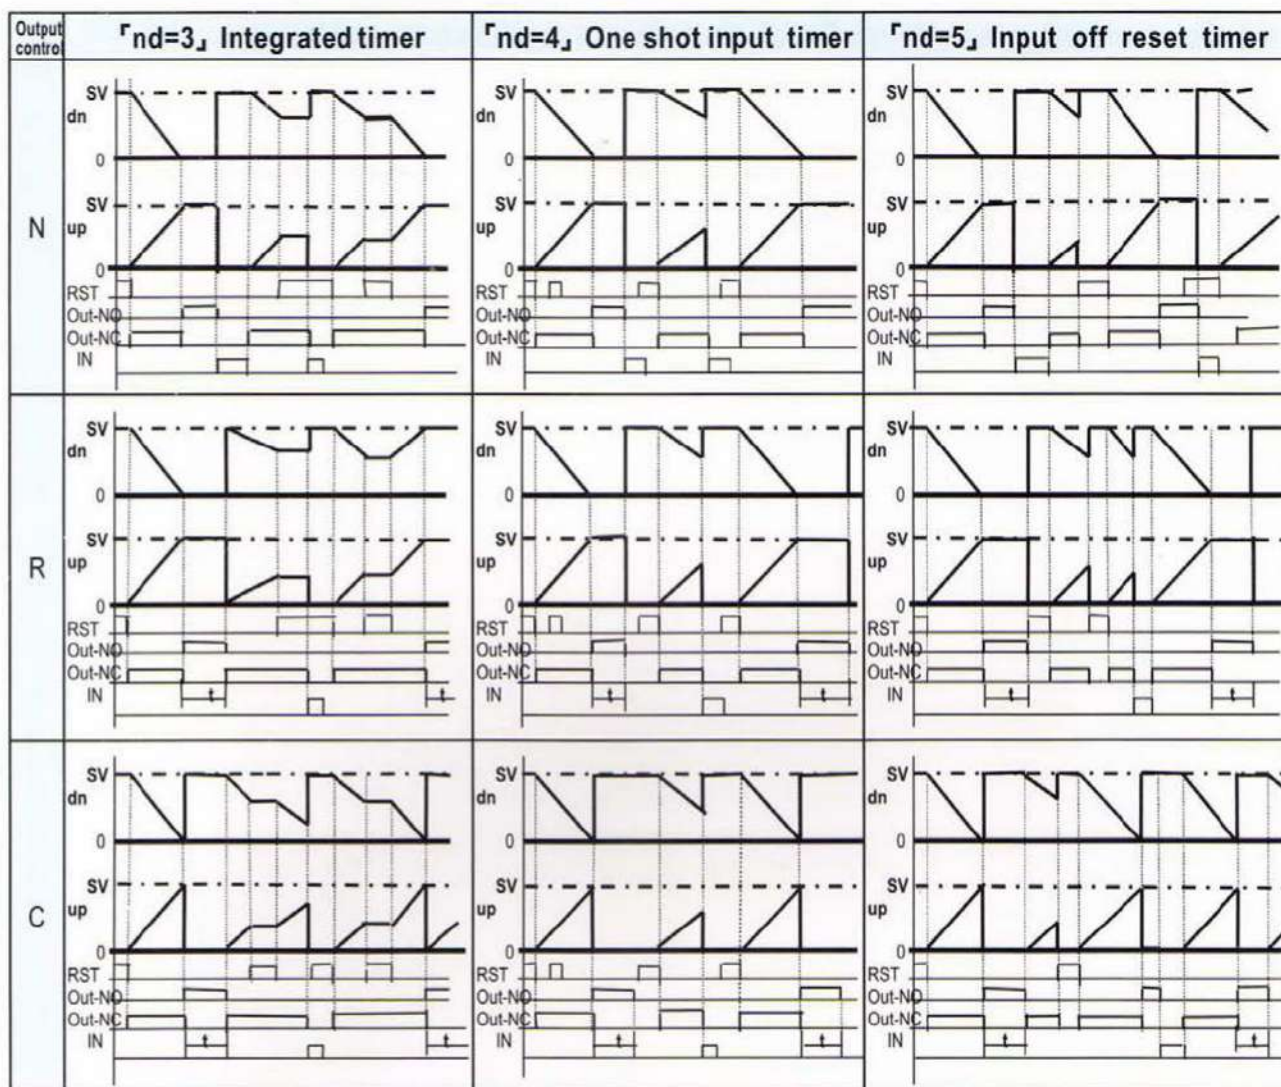

■ Connection diagram / 接線圖

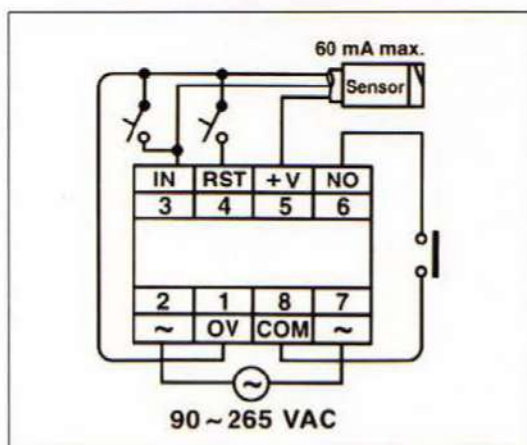


- ☆ G4Q-K1, One Relay NO/NC
Exchange by Ex. Input.
- ☆ G4Q-K2, Two Relay NO
Exchange by Ex. Input.



Specification

Model	G4Q-K1	G4Q-K2
Output Method	One Relay	Two Relay
Control Status	1a / 1b	2a
Power Supply	110V or 230V or 380V AC	
Frequency	50 ~ 60 Hz	
Wattage	3VA Max.	
Contact Rated	10A	
Switching Times	3600 Times / Hr	
Reset Time	0.1S Max.	
Dielectric Strength	2.5KV / 1 min.	
Insulation Strength	100M Ω / 500 VDC	
Life	20 X 10 ⁶ Times	
Circumstance	-20° ~ +60°C ; 35~85% RH	
Weight	175g	185g

Dimension

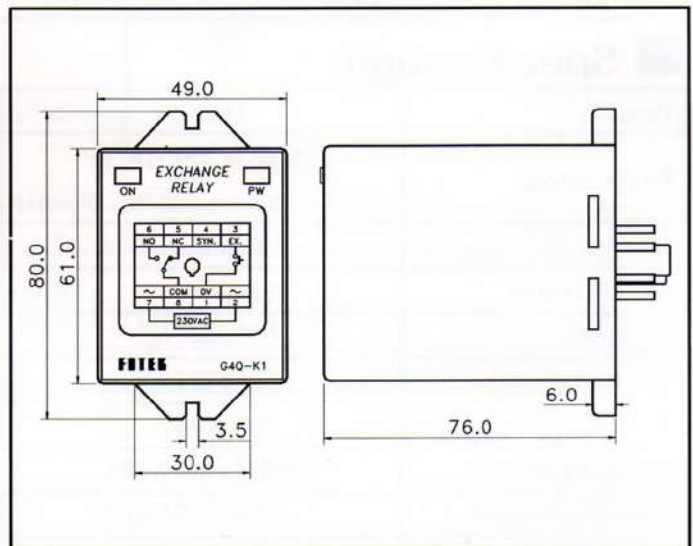

Connection Diagram

G4Q-K1	G4Q-K2

- * Operation easy
- * Weekly programmable clock
- * 32 segment of preset time per day
- * 20 modes of function
- * With long time Ni-cd Recharged battery
- * Clock memory time over 1 year
- * Large size LED display




Specification / 規格


Outline		DIN 48*48	DIN 72*72
Model		TW-48	TW-72
Power supply	工作電壓	90~265 VAC/ 50/60 Hz	
Power consumption	消耗電流	5 VA max.	
Control method	控制方式	Auto / Manual / Turn-off selectable	
Control output	控制輸出	Relay	
Rated current	額定電流	5A/250VAC	
Display range	顯示範圍	Week : 1~7 ; Time : 00.00~23.59	
Preset stage	設定段數	32 stage	
Memory method	記憶方式	EEPROM & Recharged battery	
Memory time	記憶時間	12 months min.	
Insulation resistance	絕緣強度	OVER 50MΩ/500VDC	
Dielectric strength	耐壓強度	OVER 2.5 KV/ 1 MINUTE	
Operating circum.	使用環境	-20°C~75°C : 35%~85% RH	
EMC standard	EMC 標準	ESD : 8 KV Air Discharge (Level3) / EN-61000-4-2 RF Interference : 10V / M / ENV-50140 Burst test : 2KV / EN61000-4-4	

Connections / 接線圖

TW-48

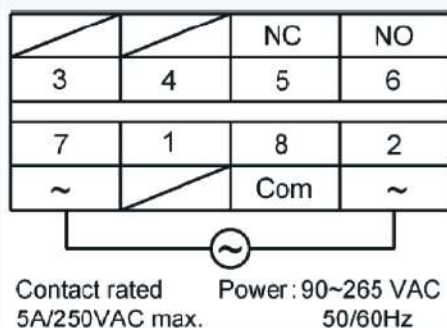

TW-72

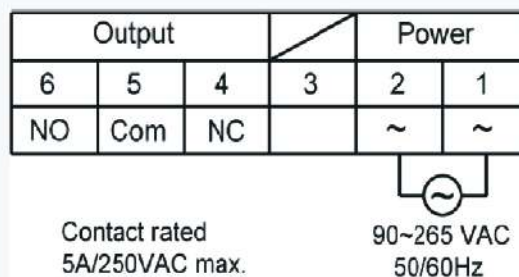

Setting of clock / 時鐘時間設定

Function	Display	Range	Description
Control status 控制狀態 Press [ENT] & [▲] Key ↓ 3 sec Setting of clock 現在時間 設定 Press [ENT] Key	00.00 108.30 EL: nE n --. --	0 ~ 23.59	「n」：Setting of day (1~7) 「--.--」：Preset time (00.00~23.59) - Press 「F」、「▲」 or 「▼」 keys to set time - Press 「ENT」 key to enter the preset time 「n」：星期幾設定 (1~7) 「--.--」：時間設定 (00.00~23.59) - 按「F」、「▲」、「▼」鍵可設定時間 - 按「ENT」鍵可輸入設定值

Setting of start/stop time / 動作時間設定

Function	Display	Range	Description
Control status 控制狀態 Press [ENT] 3 sec Setting of start time 起動時間設定 Press [ENT] Key Setting of stop time 停止時間設定 Press [ENT] Key Setting of start time 起動時間設定 Press [ENT] Key Setting of stop time 停止時間設定 Press [ENT] Key Setting of start time 起動時間設定 Press [ENT] Key Setting of stop time 停止時間設定 Press [ENT] Key 3 sec	00.00 108.30 On.01 n --. -- OF.01 n --. -- On.02 n --. -- OF.02 n --. -- On.XX n --. -- OF.XX n --. --	00.00~23.59 1~7 1~32 1~7 00.00~23.59 1~32 1~7 00.00~23.59 1~32 1~7 00.00~23.59 1~32 1~7 00.00~23.59 1~32 1~7 00.00~23.59	「On.01」：Setting of start segment (1~32) 「OF.01」：Display of stop segment (1~32) 「n」：Setting of day (1~7) 「--.--」：Setting of time (00.00~23.59) 「n」：Setting time of next day - Press 「F」、「▲」 or 「▼」 keys to preset time - Press 「ENT」 key to enter the preset time - Press 「ENT」 key over 3 seconds may return to The control status, meanwhile reset the preset time of un-set segment. 「On.01」：啟動段數設定 (1~32) 「OF.01」：停止段數不可設定 「n」：星期幾設定 (1~7) 「--.--」：時間設定 (00.00~23.59) 「n」：隔日時間設定 - 按「F」、「▲」、「▼」鍵可設定時間 - 按「ENT」鍵可輸入設定值 - 按「ENT」鍵3秒後跳出時間設定，並關閉未完成時間設定的段數。

Setting of output control method / 輸出控制模式選擇



Function	Display	Range	Description
Control status 控制狀態 Press ▲ Key 3 sec	00.00 108.30	1. 00.00 2. nn.on 3. nn.oF	1. Press 「▲」 key 3seconds into the status of output control mode selection. 2. Press 「▲」 key may select output control mode 3. Press 「ENT」 key to finish the selection. 4. 「00.00」 : Auto output control mode 5. 「nn.on」 : Manual output control mode 6. 「nn.oF」 : Turn off output mode
Auto output mode 自動控制輸出模式 Press ENT Key	00.00 108.30		
Manual output mode 手動控制輸出模式 Press ▲ Key	nn.on 108.30		
Turn off output mode 關閉輸出模式 Press ENT Key	nn.oF 108.30		
Auto output mode 自動控制輸出模式 Press ▲ Key	00.00 108.30		

1. 按「▲」鍵 3秒後進入輸出控制模式選擇
2. 按「▲」鍵可選擇輸出控制模式
3. 按「ENT」鍵即完成輸出控制選擇
4. 「00.00」：自動控制輸出模式
5. 「nn.on」：手動控制輸出模式
6. 「nn.oF」：關閉輸出模式

Setting of mode / 模式選擇

Function	Display	Range	Description
Control status 控制狀態 Press ENT & F Key 3 sec	88.88 8.88.88		
Setting of Lock 鎖住設定 Press ENT Key	Lock 0	0 ~ 10	1. 「Lock=10」 : Settable 2. 「Lock≠10」 : Un-settable
Selection of mode 動作模式選擇 Press ENT Key	ModE 0	0 ~ 20	※ Please refer to control mode 1. 「R」 : Auto start in the ON or OFF status 在ON orOFF狀態都可自動啟動 2. 「n」 : Auto start in the ON status only 在ON狀態才可自動啟動
Selection of start mode 強制啟動選擇 Press ENT Key	R_n n		






Outline dimension / 外形尺寸




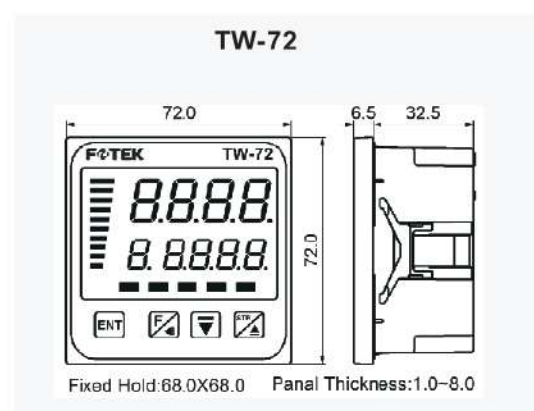
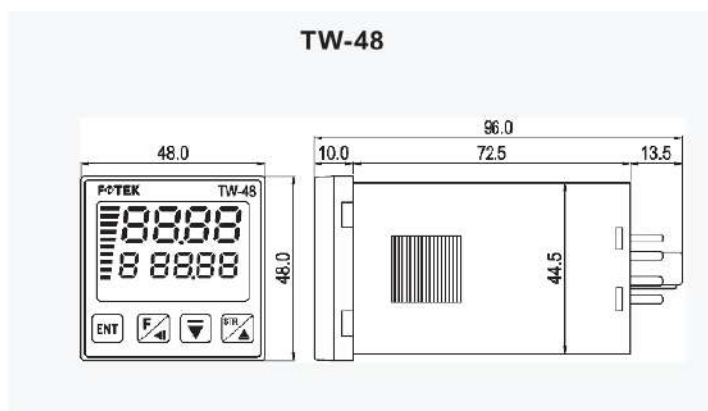


Control mode / 時間動作模式

Mode	Display	Description
0	【1.】	Start/Stop time setting from Monday to Sunday (週一 ~ 週日可個別設定)
1	【1.】	Start/Stop time setting on Monday only (只有週一動作的時間設定)
2	【2.】	Start/Stop time setting on Tuesday only (只有週二動作的時間設定)
3	【3.】	Start/Stop time setting on Wednesday only (只有週三動作的時間設定)
4	【4.】	Start/Stop time setting on Thursday only (只有週四動作的時間設定)
5	【5.】	Start/Stop time setting on Friday only (只有週五動作的時間設定)
6	【6.】	Start/Stop time setting on Saturday only (只有週六動作的時間設定)
7	【7.】	Start/Stop time setting on Sunday only (只有週日動作的時間設定)
8	【n.】	Same Start/Stop time setting from Monday to Sunday (週1 ~ 週日相同動作時間設定)
9	【n.】	Same Start/Stop time setting from Monday to Saturday (週1 ~ 週6相同動作時間設定)
10	【n.】	Same Start/Stop time setting from Monday to Friday (週1 ~ 週5相同動作時間設定)
11	【n.】	Same Start/Stop time setting on Mon/Wed/Friday (週1/3/5相同動作時間設定)
12	【n.】	Same Start/Stop time setting on Tue/Thu/Saturday (週 2/4/6相同動作時間設定)
13	【n.】	Same Start/Stop time setting on Saturday/Sunday (週6/7相同動作時間設定)
14	【n.】	Same Start/Stop time setting from Monday to Thursday (週1/2/3/4相同動作時間設定)
15	【n.】	Same Start/Stop time setting from Friday to Sunday (週5/6/7相同動作時間設定)
16	【n.】	Same Start/Stop time setting from Monday to Wednesday (週1/2/3相同動作時間設定)
17	【n.】	Same Start/Stop time setting from Thursday to Saturday (週4/5/6相同動作時間設定)
18	【n.】	Same Start/Stop time setting from Sunday to Thursday (週日/1/2/3/4相同動作時間設定)
19		Accepted order to modify (接受訂製)


SOCKET & ATTACHMENT

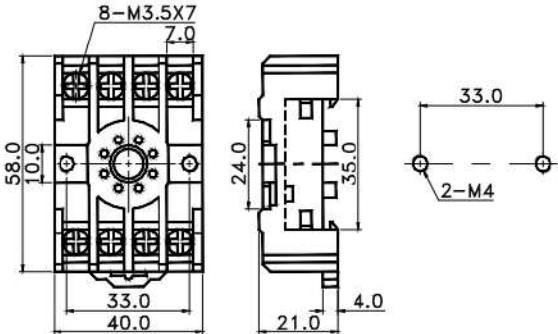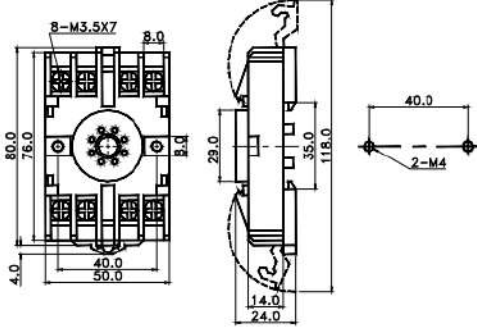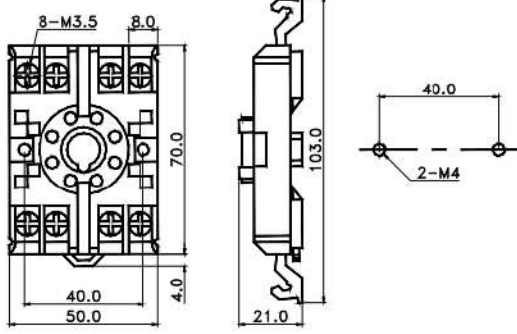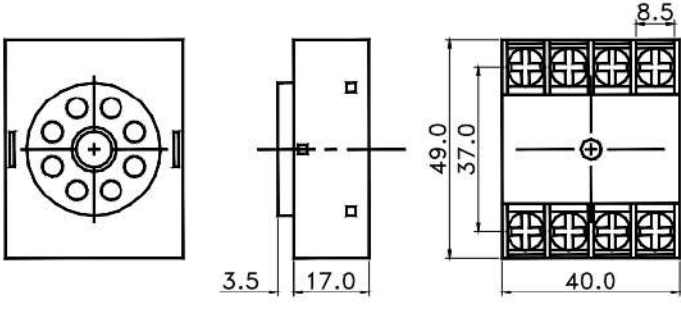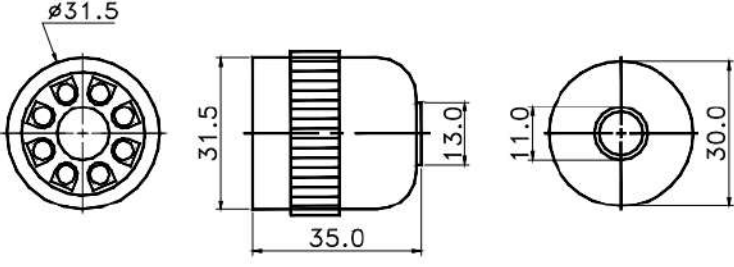PF085A	H3 series	 
8PFA	STP series	 
P2CF-08	H5B series	 
P3G-08	Panel type	 
US-08	Panel type	 

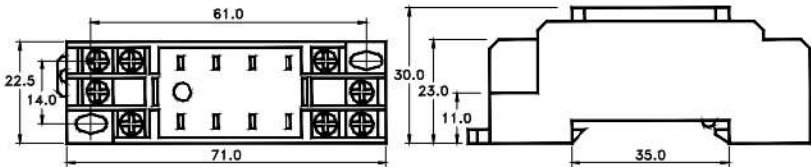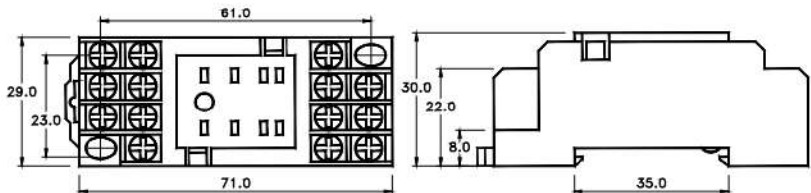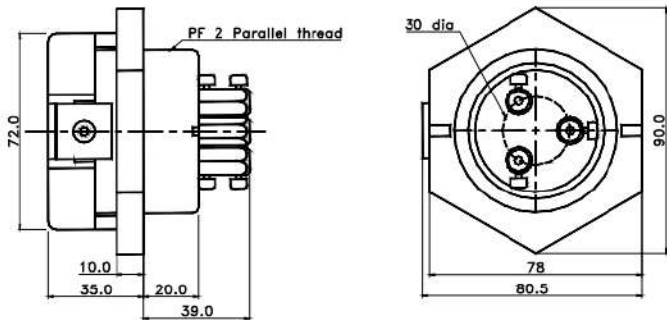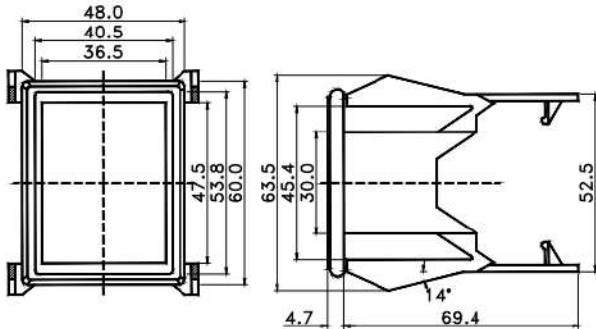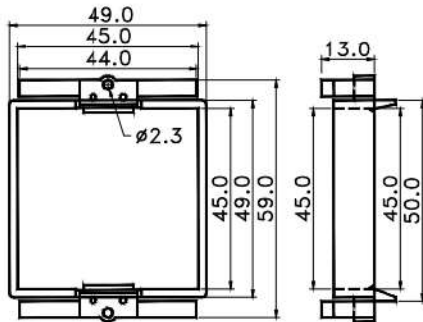PYF08A	MY-2P series	 
PYF14A	MY-4P series	 
PS-3S	FR series	 
Y-40	H3 series	 
Y-48	H5 series	 



-
- product name:
TIMER SERIES SOCKET & ATTACHMENT
 - model: Y-20
 - Type: Flush Mounting Adapter

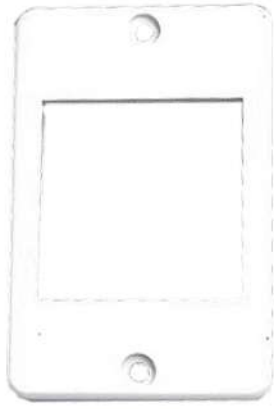

-
- product name:
TIMER SERIES SOCKET & ATTACHMENT
 - model: Y-57
 - Type: Flush Mounting Adapter



-
- product name:
TIMER SERIES SOCKET & ATTACHMENT
 - model: H5-SL
 - Type: Protective Case



-
- product name:
TIMER SERIES SOCKET & ATTACHMENT
 - model: SY-HL
 - Type: Protective Case



-
- product name:
TIMER SERIES SOCKET & ATTACHMENT
 - model: SY-SL
 - Type: Protective Case

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Калининград (4012)72-03-81	Омск (3812)21-46-40	Сыктывкар (8212)25-95-17
Ангарск (3955)60-70-56	Калуга (4842)92-23-67	Орел (4862)44-53-42	Тамбов (4752)50-40-97
Архангельск (8182)63-90-72	Кемерово (3842)65-04-62	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Киров (8332)68-02-04	Пенза (8412)22-31-16	Тольятти (8482)63-91-07
Барнаул (3852)73-04-60	Коломна (4966)23-41-49	Петрозаводск (8142)55-98-37	Томск (3822)98-41-53
Белгород (4722)40-23-64	Кострома (4942)77-07-48	Псков (8112)59-10-37	Тула (4872)33-79-87
Благовещенск (4162)22-76-07	Краснодар (861)203-40-90	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Красноярск (391)204-63-61	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Курск (4712)77-13-04	Рязань (4912)46-61-64	Улан-Удэ (3012)59-97-51
Владикавказ (8672)28-90-48	Курган (3522)50-90-47	Самара (846)206-03-16	Уфа (347)229-48-12
Владимир (4922)49-43-18	Липецк (4742)52-20-81	Саранск (8342)22-96-24	Хабаровск (4212)92-98-04
Волгоград (844)278-03-48	Магнитогорск (3519)55-03-13	Санкт-Петербург (812)309-46-40	Чебоксары (8352)28-53-07
Вологда (8172)26-41-59	Москва (495)268-04-70	Саратов (845)249-38-78	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Мурманск (8152)59-64-93	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Набережные Челны (8552)20-53-41	Симферополь (3652)67-13-56	Чита (3022)38-34-83
Иваново (4932)77-34-06	Нижний Новгород (831)429-08-12	Смоленск (4812)29-41-54	Якутск (4112)23-90-97
Ижевск (3412)26-03-58	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31	Ярославль (4852)69-52-93
Иркутск (395)279-98-46	Ноябрьск (3496)41-32-12	Ставрополь (8652)20-65-13	
Казань (843)206-01-48	Новосибирск (383)227-86-73	Сургут (3462)77-98-35	
Россия +7(495)268-04-70	Киргизия +996(312)-96-26-47	Казахстан +7(7172)727-132	